


## Automatic Label Applicator PMG 120

Construction of label Applicator PMG120 allows to mount it on various working production line to apply labels on top, side and bottom of moving products. PMG120 has simple and reliable construction, microprocessor controller and high quality components that enable easy operation and service of this machine. Device of label tape roller is open and it allows changing the roll of label within 1-2 minutes. The angle of Applicator PMG120 can be easily changed using various universal mounting brackets and stand. It can be easily integrated in to transportation line as well.

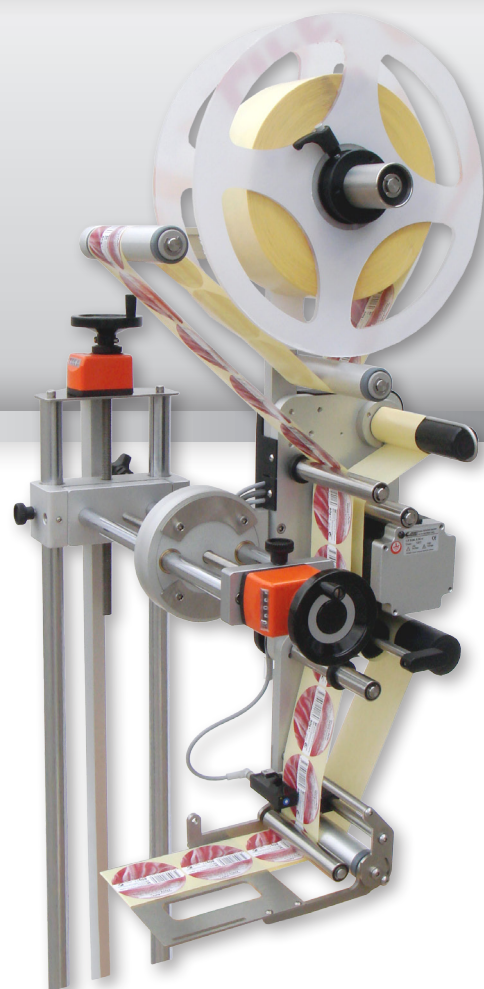

### TECHNICAL SPECIFICATIONS

PMG- LS/120		PMG- HS/120	
Dispensing speed	7-30 m/min	Dispensing speed	1-60 m/min
Label width	10-120 mm	Label width	10-120 mm
Label length	10-250 mm	Label length	10-250 mm
Outside reel diameter	300 mm	Outside reel diameter	300 mm
Reel core diameter	76 mm	Reel core diameter	76 mm
Voltage	230v, 50hz	Voltage	230v, 50hz
Power supply	100w	Power supply	150w
Weight*	13 kg	Weight*	13 kg
Features		Features	
Label start delay		Label start delay	
Label stop delay		Label stop delay	
Product counter		Product counter	
		LCD Display	
		40 diferent parametrs memory	
		Recovery of missing label	
		Control for pneumatics	
		Pulse generator input	

\* Without control box and mounting