


Label Printer - Applicator **V-SX**

Printer Applicator with fast and accurate application of labels on the production line. This applicator is designed to apply the label on top or side of the product. It operates when the product is moving. Easily adjusted to all packing systems.

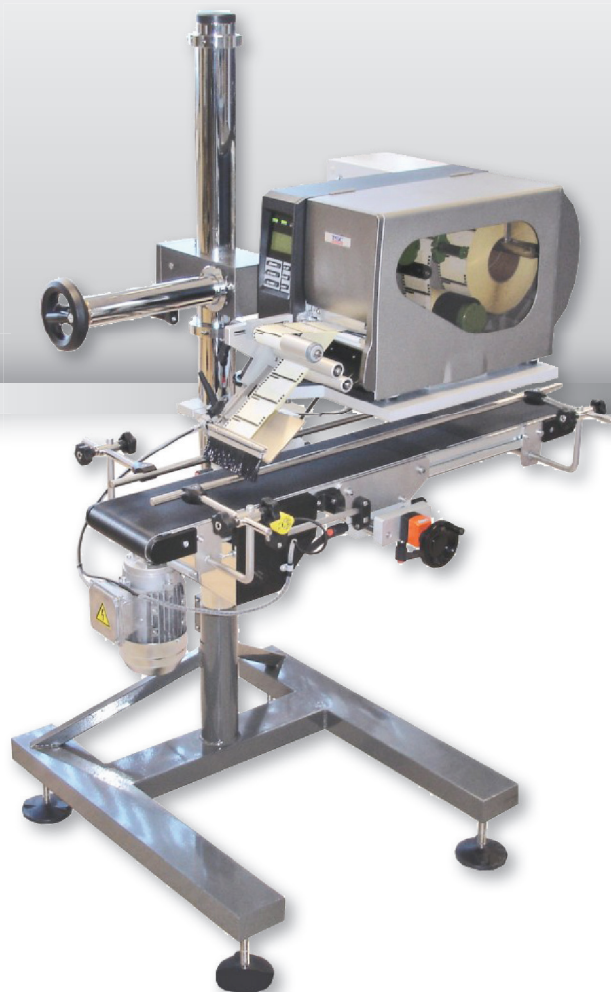

TECHNICAL SPECIFICATIONS

Printing method	Thermal transfer / Thermal
Print Head	Flat Head
Resolution	203 dpi, 300 dpi, 600dpi
Functions	Peel off module / rewinder
Interface	RS-232C, Centronics, USB 2.0, internal Ethernet print server
Print speed	TTP-2410MT up to 356 mm/s; TTP-346MT up to 254 mm/s; TTP-644MT up to 102 mm/s
Print width	Max 104 mm
Print length	TTP-2410MT up to 25400 mm; TTP-346MT up to 11430 mm; TTP-644MT up to 2540mm
Ribbon length	600 m
Dimensions	270 (W) x 308 (H) x 515 (D) mm
Weight	15 kg