XP-T271U

Thermal Label / Receipt printer

BARCODE PRINTER

BARCODE PRINTER

Features

- Adjustable print speed
- Min 50.8mm / s, Max 101mm/s
- Print width: Max56mm
- Print height: Max100mm, Min 10mm
- Maximum paper roll diameter: 80mm
- Standard support 12mm / 25.4mm paper roll core hanging paper
- Support IAP online upgrade
- Support thermal paper roll/ thermal adhesive paper
- Supports label and receipt printing
- High-sensitivity sensor: photoelectric sensor to ensure accurate paper detection
- Multiple interface Options: USB / USB + BT / USB+WiFi / USB+4G.

Applications

- Food Delivery Service
- Shopping Mall
- Hospital
- Supermarket

BARCODE PRINTER

Xprinter®

Specification

Model	**XP-T271U**	
Print method	Thermal label	Thermal receipt
Print resolution	203DPI	384 dots/line
Paper width	20-60mm	58mm
Print width	Max: 56mm	
Print speed	Min: 50.8mm/s, Max:101mm/s	90mm/s
Media width	20mm~60mm	58mm
Paper roll	Max: 80mm	
External diameter		
Paper roll internal diameter	Min:12mm	
Paper exit method	Tearing off	
Print head temperature detection	Thermistor	
Print head position detection	Micro Switch	
Media detection	Photoelectric Sensor	
Interface	USB / USB + BT / USB +Lan Option: Cloud Printer (USB+WIFI, USB+4G / USB+WiFi+4G / USB+BT+WiFi / USB+BT+4G / USB+BT+WiFi+4G	
Barcode 1D code	CODE128 / EAN128 / ITF / Cross 25 code / CODE39 / CODE39C / CODE39S / CODE93 / EAN13 / EAN13+2 / EAN13+5 / EAN8 / EAN8+2 / EAN8+5 / CODABAR / POSTNET / UPC-A / UPCA+2 / UPCA+5 / UPCE / UPCE+2 / UPCE+5 / MSI / MSIC / PLESSEY / ITF14 / EAN14 2D Code: QRCODE	UPC-A/UPC-E / JAN13(EAN13) / JAN8(EAN8) / CODE39/ ITF/CODABAR/ CODE93/CODE128
Character size	Character set Common single-byte fonts: FONT 0~FONT 8	ASCII Code FontA:12x24 dot FontB:9x17 dot GB18030/BIG5/KSC5601 simplified/traditional Chinese:24*24 dot
Media type	Thermal paper,Thermal adhesive paper	Thermal paper
Power	DC12V/2.6A	
Work environment Storage environment	5 ~ 45°C, humidity: 20~80% RH (no frost) −40 ~ 55°C, humidity: W93% RH (40°C)	
Operating system	WINDOWS/ Android / IOS	
Gross weight Dimension	0.801kg 176.2×126×129.7mm(D×W×H)	

Label & Receipt printing

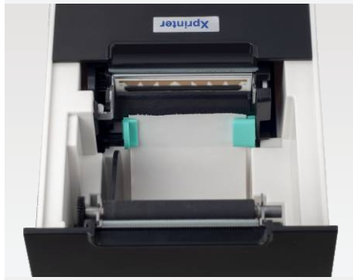

Standard version support 12mm / 25.4mm paper roll

Adjustable print speed
Min 50.8mm/s, Max101mm/s

Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

android iOS Windows Linux

Copyright © Zhuhai Poskeytech Technology Co., Ltd. All Rights Reserved